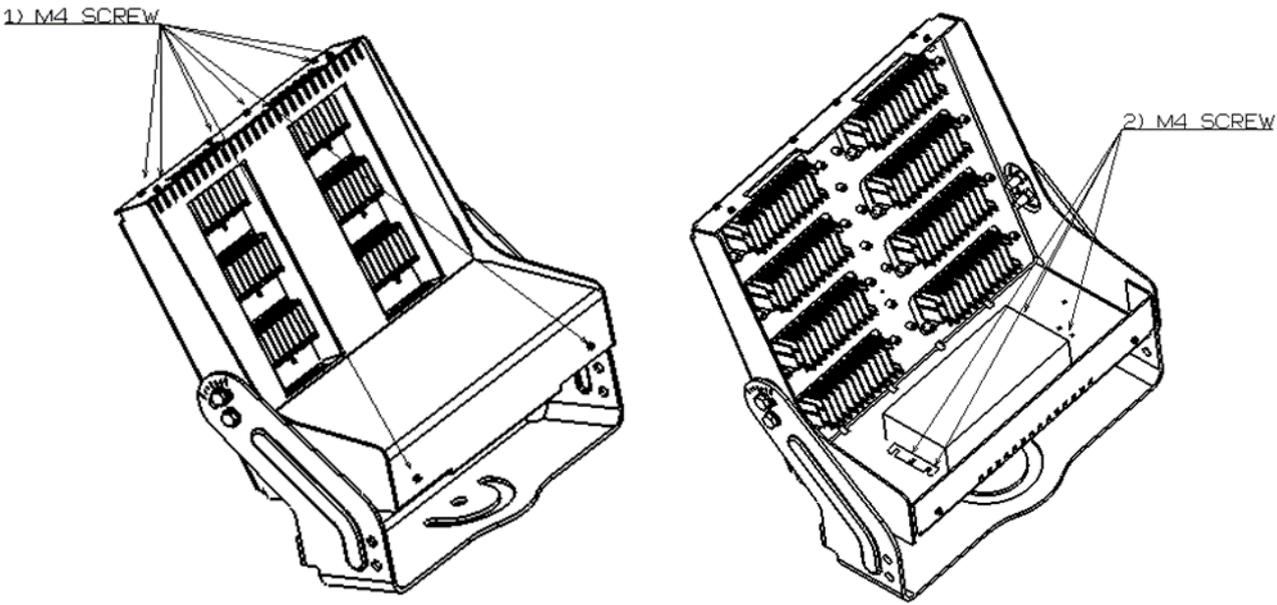


Control gear included in LLF0011A

Model identifier	EBC-420S140SV
Maximum output power	420W
Type of light source(s) for which it is intended	LED
Efficiency in full-load	94.0 %
No-load power (P_{no})	NA ※Not intended to operate in no-load mode
Standby power (P_{sb})	NA
Networked standby power (P_{net}),	NA
Dimming	Not suitable
Outer dimensions	224 mm x 98 mm x 44.5 mm
Mass	1850 g
Instructions on how to remove lighting control parts and/or non-lighting parts, if any, or how to switch them off or minimize their power consumption	NA
List of compatible dimmable light sources	NA
Recommendations on how to dispose of it at the end of its life in line with Directive 2012/19/EU.	This product is separately collected WEEE. Remove the external electric cable before disposing. The cable shall be disposed of or recovered in compliance with Directive 2008/98/EC
Replaceability or non-replaceability by end-users or qualified persons without permanent damage to the containing product	Replaceable
<p>Dismantling procedure from containing products at end of life Step 1) Loosen the M4screw 8pcs. Open the cover. Step 2) Loosen the M4screw 4pcs.</p> 	

※The above is the product information based on Article 4 2019/2020 and Point 3(c) of Annex II 2019/2020

Light source included in LLF0011A

Model identifier	LLM1205A/MCB/ASSY (5000K)
The reference control settings, and instructions on how they can be implemented, where applicable	NA
Instructions on how to remove lighting control parts and/or non-lighting parts, if any, or how to switch them off or minimize their power consumption	NA
If the light source is dimmable: a list of dimmers it is compatible with, and the light source	NA
Recommendations on how to dispose of the light	This product is separately collected WEEE.

source at the end of its life in line with Directive 2012/19/EU	There are no components to remove from separately collected WEEE according to Article 8.
Replaceability or non-replaceability by end-users or qualified persons without permanent damage to the containing product	Non-replaceable
Dismantling procedure from containing products at end of life	
This light source can be disassembled with common tools.	

※The above is the product information based on Article 4 2019/2020 and Point 3(c) of Annex V 2019/2015

Revision history

REVISIONS	DATE	REV. BY
New document issue	2022-02-09	Y.Kawaguchi