

LEDSFOCUS LINE

LED linear lighting LLM1389A

Express with linear light

LEDSFOCUS
Landscape Lighting

LEDSROAD
Road Lighting

LEDSHIGHMAST
Outdoor LED floodlight

LEDSHIGHBAY
Indoor Maintenance-Free
Lighting

LEDSFOCUS

LED linear lighting LLM1389A



pdf data

Concept

We designed a lens that uses ultra-narrow light distribution technology instead of a light-shielding method. By efficiently squeezing the LED light to create a narrow ray of light, we have realized a low-power and small-sized linear distribution lighting that can be used for various productions with just a few LEDs. Abundant color variations are available to meet the demands for a wide range of light-up effects. Possessing high level of resistance to water and dust, the lighting fixture can be used in any kind of environment.

Features



Linear light distribution

A vivid track of light is achieved.

Variety in color

In addition to white of 3000K, 4000K, and 5000K, there is red, green and blue available.

Compact and lightweight

A very compact and light body with $\phi 98\text{mm}$ and 230g.

Low power consumption

Operates with power as low as 4.9W.

Water/dust proof

Available for outdoor usage with IP65.

Projects



Stanley's booth at LIGHTING FAIR

Color Variations



light source



light source



light source



light source


These photos are for illustrative purposes.

Product Image



External Dimensions

unit: mm

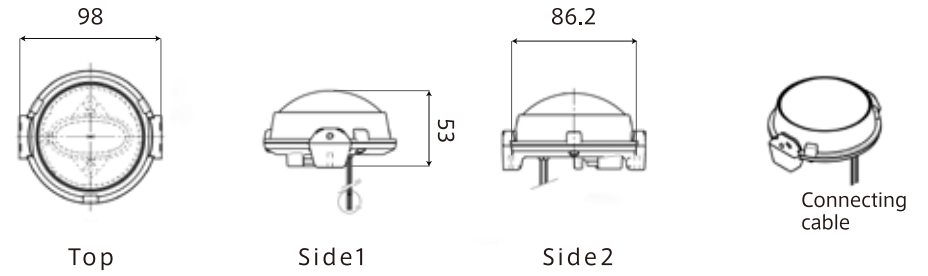

Specifications

Part No.	1/2 Beam Angle (°) short end	2.5	2.5	2.5	2.8	2.5	2.5
LLM1389A	1/2 Beam Angle (°) longitudinal	70	70	70	79	74	74
	Color Temp. / Color Lineup	5000K	4000K	3000K	Red	Green	Blue
	Centerluminous intensity (cd)	4,120	3,620	3,460	980	2,780	1,190
	Color Rendering Index (Ra)	70	80	80	-	-	-
	Forward voltage	8.5V	8.5V	8.5V	7.0V	9.5V	9.7V
	Power Consumption	6.0W	6.0W	6.0W	4.9W	6.6W	6.8W

Material: Body: aluminum die-cast, Lens: polycarbonate
Rated constant input current: 0.7A
Ambient Temperature: -30 ~ +50°C
Waterproof and dustproof: IP65
LED light source lifetime: 40,000h (lumen maintenance factor 70%)
Weight: 230g
Optional Parts: Bracket
 *Power source is sold separately.

Projection Area

